


N-8031SB

▶ Hands-Free Master Station Board Unit

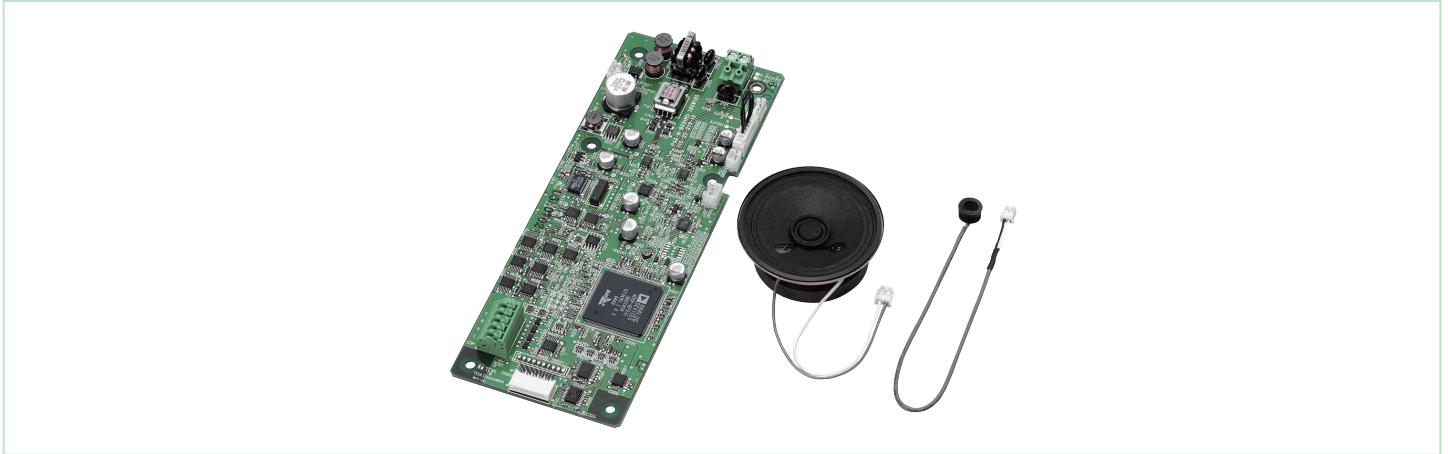

FEATURES

- ▶ N-8031DS PCB for custom station applications
- ▶ Speaker and microphone included
- ▶ External dial inputs (7, 8,9 and C keys) plus switch matrix connection
- ▶ LED Status Indicator output
- ▶ Optional Handset, model RS-191
- ▶ 70 (W) x 185 (H) x 20.6 (D)mm (2.76" x 7.28" x 0.81")
- ▶ 205 g (0.45 lb) (including accessories).

SPECIFICATIONS

N-8031SB

Power Source:	48 V DC (from the IP network intercom exchange (option))
Power Consumption:	1.8 W (rated), 2.4 W (max.)
Wiring Method:	1 set of twisted pair cables
Speech Method:	Hands-free conversation (Handset conversation with the RS-191(option))
Audio Frequency Range:	300 – 7,000Hz
Transmission Range:	Max. 1500m (ø0.65mm. Loop resistance 170)
Dial Input:	Solderless connector (10 pins, male), open voltage: 3.3V DC, short-circuit current: 1mA
External Dial Input:	No-voltage make contact input, open voltage: 5V DC, short-circuit current: 1mA, screwless connector (5 pins)
Contact Output:	-
Finish:	Body, Handset: ABS resin, gray
Dimension (WxHxD):	70 x 185 x 20.6 mm
Weight:	205g (incl. accessories)
Option:	Handset: RS-191